




HULME MARTIN HEAT SEALERS

HULME MARTIN HEAT SEALERS

www.hulmemartin.co.uk

Hulme Martin Heat Sealers Ltd
Unit 5B, Country Business Centre
White Cottage Farm
Lucas Green Road, West End
Woking, Surrey
GU24 9LZ
Tel: 01483 476767
Fax : 01483 486343
Email: info@hulmemartin.co.uk

HM1800 HOD

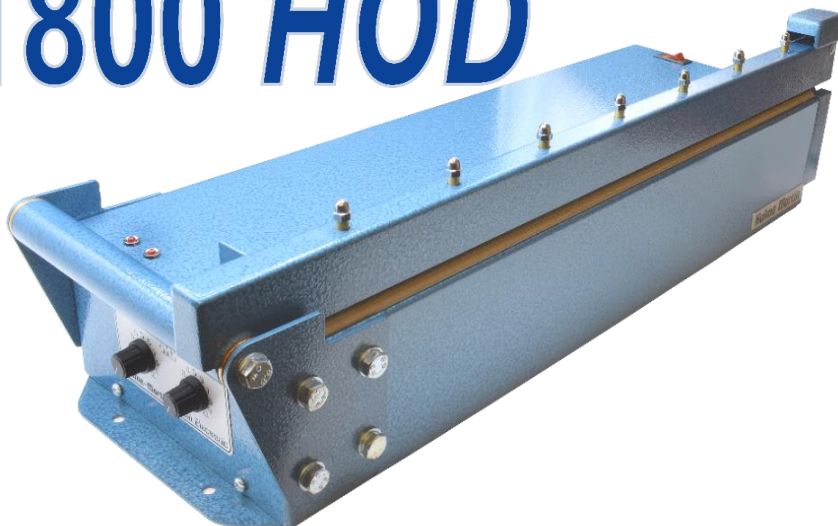

(Foot Operated, Medium Capacity Impulse Heat Sealer) – Part No. 18102052

Maximum Sealing Length	490mm (18")
Seal Width	6mm (Wide)
Film Thickness	2 x 1000 gauge (4 x 250 micron)
Voltage	240V, 110V (Conversion)
Power Consumption (Watts)	560W (per seal)
Fuse Rating	T 3.15 amp
Footprint	607mm (L) x 190mm (W) x 150mm (H)
Weight	12 Kg
Operation	Hand Operated (with Hold Down Latch)
Mounting	Bench or Wall Mounted
Options	T-Wire (Seal-Cut-Seal), Round Wire (Cut-&-Seal), Rollers/Brackets & Retainers (for Layflat Tubing), 3mm (Standard) seal - Emboss Alphanumeric Characters for use ONLY with 6mm (Wide) seal

The **HM 1800 HOD** – Medium Capacity Impulse Heat Sealer

For applications requiring hand operation & wide opening jaws, the HM1800 series can be supplied in this HOD version.

Fitted with a 6mm element enabling production of a tamperproof security coded seal.

An optional narrow element can be supplied for reduced sealing times (on thicker materials not requiring the embossed code).

A Dual Timer control enables both heating & cooling cycle time to be adjusted for different materials, the hold down latch (HOD) releases the operator during the 3-7 second sealing cycle, to prepare the next pack.

This machine is simple to maintain with consumable spares being easy to fit & available from stock.

**IMPULSE • CONSTANT HEAT SEALERS • VACUUM SEALERS • SHRINK CHAMBERS
SACK SEALERS • BESPOKE SOLUTIONS • SEMI-AUTOMATIC MACHINES • SECURITY SEALERS**
Registered office: Unit 5B Country Business Centre, White Cottage Farm, Lucas Green Road, West End, Woking, Surrey, GU24 9LZ
Registered in England No. 5484051 VAT No. GB 864 4792 82