




HULME MARTIN HEAT SEALERS

HULME MARTIN HEAT SEALERS

www.hulmemartin.co.uk

Hulme Martin Heat Sealers Ltd
Unit 5B, Country Business Centre
White Cottage Farm
Lucas Green Road, West End
Woking, Surrey
GU24 9LZ
Tel: 01483 476767
Fax : 01483 486343
Email: info@hulmemartin.co.uk

HM 1800 E/Standard

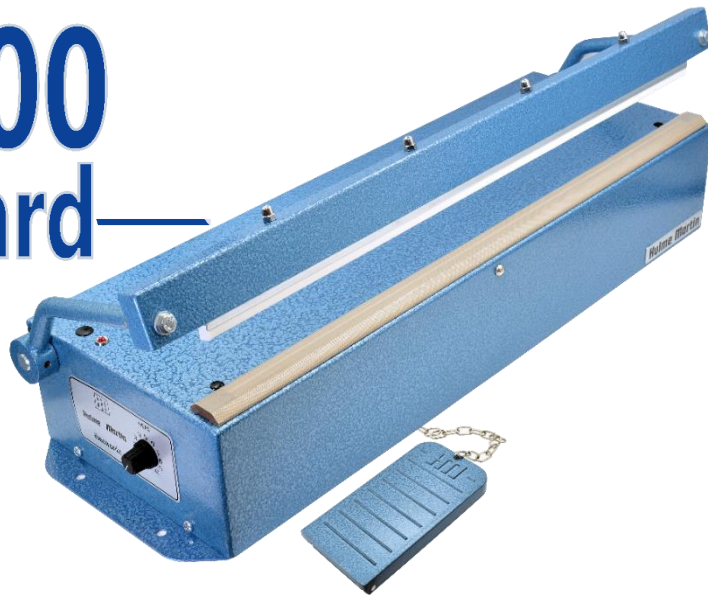

(Foot Operated, Medium Capacity Impulse Heat Sealer) – Part No. 18001061

Maximum Sealing Length	490mm (19.5")
Seal Width	3mm (Standard)
Film Thickness	2 x 1000 gauge (2 x 250 micron)
Voltage	240V, 110V (Conversion)
Power Consumption (Watts)	415W (per seal)
Fuse Rating	T 3.15 amp
Footprint	607mm (L) x 190mm (W) x 190mm (H)
Weight	12.5 Kg
Operation	Foot Operated (via Chain & Pedal)
Mounting	Bench Mounted
Options	6mm (Wide Seal), T-Wire (Seal-Cut-Seal), Round Wire (Cut-&-Seal), Stand Kit, Rollers/Brackets & Retainers (for Layflat Tubing)

The **HM 1800 (E/Standard)** – Medium Capacity Impulse Heat Sealer

A general-purpose foot operated machine, providing great flexibility of operation. Leave hands free to manipulate large or heavy packages.

Simple bench mounting or optional Stand Kit available.

This standard model has a Single Electronic Timer for control of the heating cycle, only.

This machine is simple to maintain with consumable spares being easy to fit & available from stock.

**IMPULSE • CONSTANT HEAT SEALERS • VACUUM SEALERS • SHRINK CHAMBERS
SACK SEALERS • BESPOKE SOLUTIONS • SEMI-AUTOMATIC MACHINES • SECURITY SEALERS**
Registered office: Unit 5B Country Business Centre, White Cottage Farm, Lucas Green Road, West End, Woking, Surrey, GU24 9LZ
Registered in England No. 5484051 VAT No. GB 864 4792 82